Combiners 698-862 / 880-960/ 1710-2700MHz

Specification: 8066750 (DIN female connectors) 80667 (4.3 - 10 female connectors)			
Port	Port1	Port2	Port3
Frequency	698-862	880-960	1710-2700
Insertion Loss (dB)	≤ 0.5		
Isolation (dB)	≥ 50		
Return loss/VSWR	≤ -20dB/1.22		
Intermodulation (dBc)	≤ -155 (with 2 x 20W)		
Impedance	50 Ω		
Input Power (W)	≤ 200 W (Avg.)		
DC/AISG	By-pass (max.3000mA)		
Lightning protection	10KA; 10/350μs pulse		
Operating temperature	-20 to +65°C (Operating)		
Storage temperature	-40 to +85°C (Operating)		
Relative humidity	5% - 95%		
Application	Indoor to outdoor (IP67)		
Connectors	7-16 female or 4.3-10 female		
Packing	1pc/box		
Weight	3.2 kg		
Dimensions (mm)	200 x 186 x 52.5		
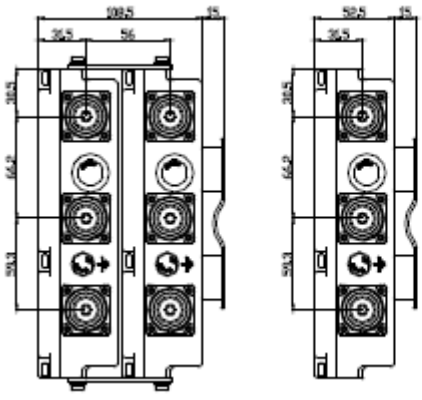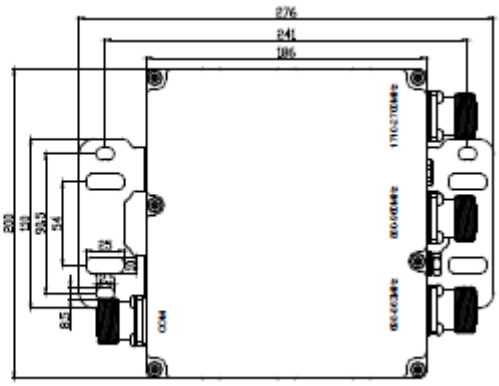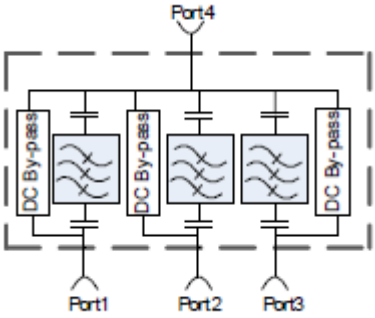
Outline Drawing